




GE Digital Energy

Product Description

Match 19"

Line-Interactive Rack-mount
Uninterruptible Power Supply
700, 1000, 1500, 2200, 3000 VA

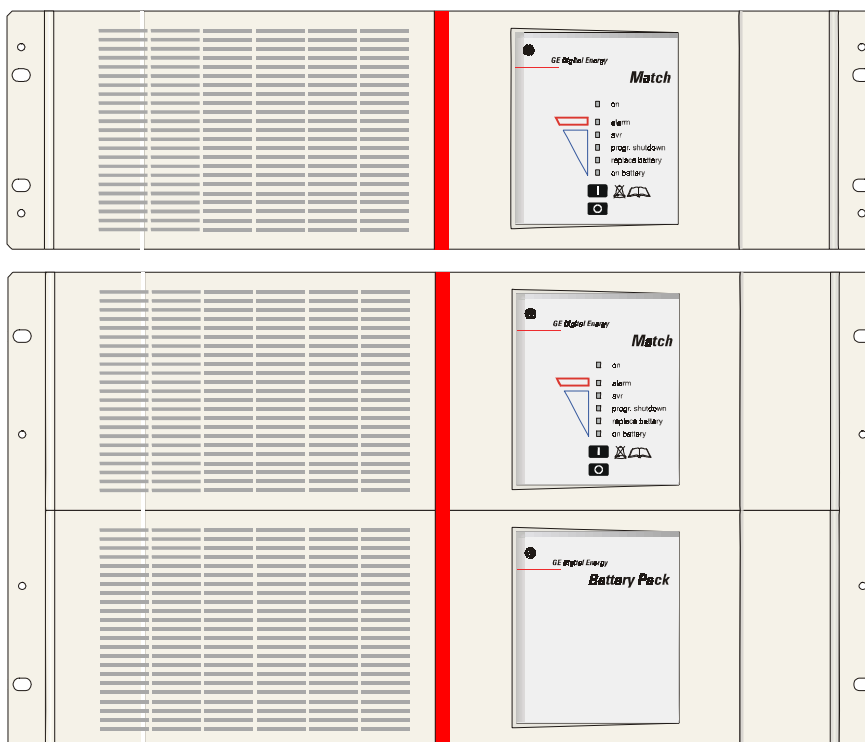

Manufactured by:

GE Digital Energy
General Electric Company
CH – 6595 Riazzino (Locarno)
Switzerland

Telephone +41 (0)91 / 850 51 51
Fax +41 (0)91 / 850 51 44
Website www.gedigitalenergy.com



Match 19" UPS *Technology for the Digital World.*

ver 0206 - GB



Contents:

1.	Introduction.....	2
2.	Functional Explanation.....	3
	2.1 Principles of Operation	
	2.2 Normal Conditions	
	2.3 Mains Failure	
3.	External Description	4
	3.1 Front and Rear Panel	
	3.2 Enclosure	
	3.3 Dimensions	
	3.4 Weight	
4.	Electrical Specifications	6
	4.1 Ratings	
	4.2 Input Converter	
	4.3 Output Converter	
	4.4 General Design Criteria	
5.	Performance Characteristics.....	7
	5.1 Efficiency	
	5.2 Environment	
	5.3 Runtimes	
	5.4 Standard Features	
6.	Communications Port: ComConnect	8
	6.1 Principles of Operation	
	6.2 Pin Functions	
7.	Batteries	9
8.	Options	9
	8.1 SNMP Interface Card	
	8.2 Relay Interface Card	
	8.3 DC Extension Cables	
9.	Transport / Storage	9

1 - Introduction

The **GE (General Electric) Digital Energy Match 19" UPS** series is a compact, modern, line-interactive system which incorporates the most advanced power electronics technology to provide exceptional protection for electrical equipment.

Each **GE Digital Energy** UPS is thoroughly tested and conforms within tolerance to the following specifications. (Data are mean values and are subject to change without notice.) Information applies to all models unless otherwise specified.

2 - Functional Explanation

2.1 Principles of Operation

The **Match 19"** UPS stores electric energy in batteries housed in the unit. This allows the UPS to supply output power even when the incoming mains power is cut off completely. Energy is stored as Direct Current (DC), while input and output energy must be Alternating Current (AC). Therefore the UPS contains a rectifier (to convert from AC to DC) and an inverter (to change energy from DC to AC). (See fig.1)

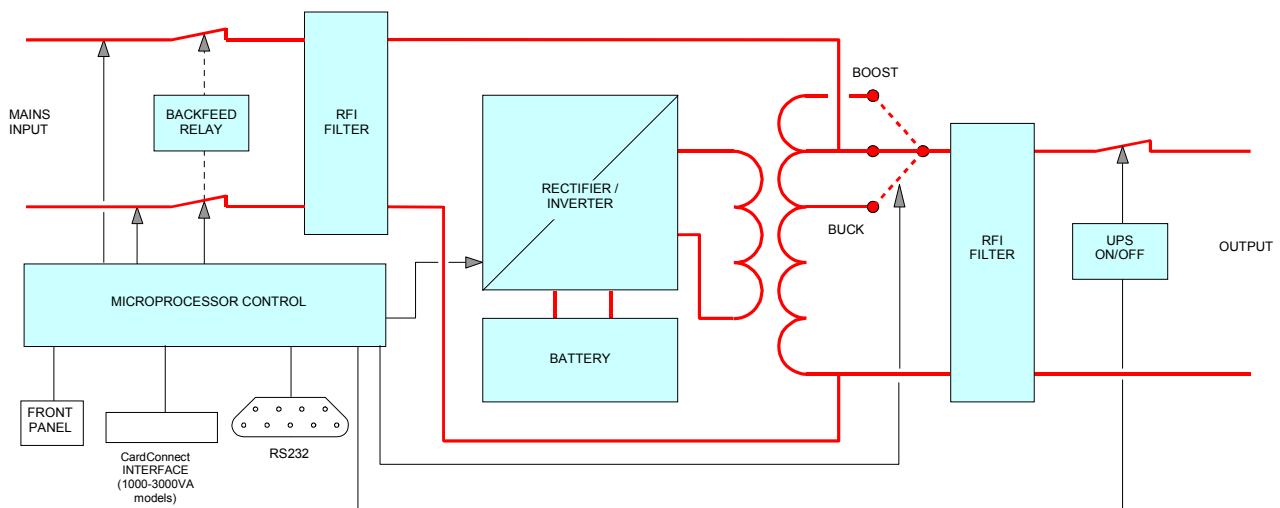


Fig. 1 Block diagram **Match 19"** UPS 700 - 3000

2.2 Normal Conditions

Under normal input conditions (see section 4.2) the load is supplied by the mains through a bypass circuit. Filtering capabilities guard against surges, spikes and high frequency interferences. The mains current also keeps the battery fully charged

The input voltage window is extremely wide: as long as the input voltage is between 165 - 275 VAC (**Match 19"** 700-1500) or even between 140 - 305 Vac (**Match 19"** 2200-3000), the Automatic Voltage Regulation (AVR) guarantees an output voltage that is between 190 - 254 Vac and acceptable for every modern ICT device.

2.3 Mains Failure

In the event of a mains power failure (i.e. absent or outside tolerance) the backfeed relay is opened and the load is supplied by the energy reserve stored in the battery. DC voltage from the batteries is transferred to the inverter which produces AC voltage for the load.

The transfer time is 4 milliseconds, sufficiently short for computers which therefore will continue to operate without interruption.

In the event of an extended mains failure, the inverter will stop when the battery energy has been used up. At this point, the UPS is no longer able to power the connected equipment.

When the mains is re-established within tolerance, the load will be supplied again by the mains and the batteries will be recharged, making them ready to support future power failures.

3 - External Description

3.1 Front and Rear Panel

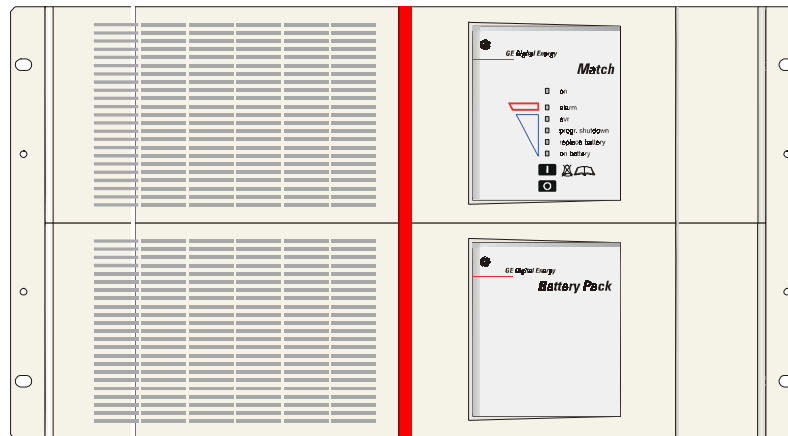


Fig. 2 Front panel **Match 19"** 2200-3000
(700-1500 VA models are without lower battery compartment)

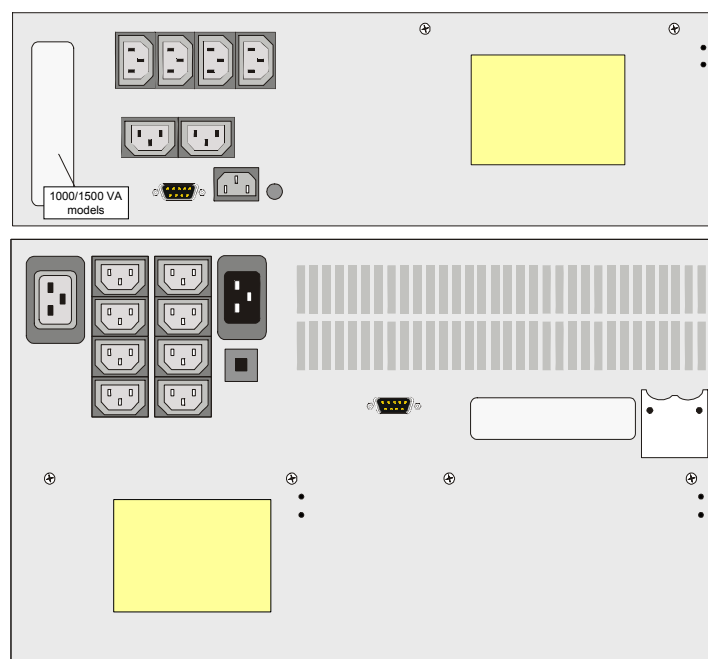


Fig. 3 Rear panels **Match 19"** 700-1500 (top) and **Match 19"** 2200-3000 (bottom)

FRONT

On	:	green LED
Alarm	:	red LED
AVR	:	yellow LED
Progr.shutdown	:	yellow LED
Replace batt.	:	yellow LED
On battery	:	yellow LED
Push-buttons	:	"I" and "O"

REAR

ComConnect	:	9-pin Sub-D male
Input socket	:	IEC 320 C14 male*
	:	IEC 320 C20 male**
Output sockets (6/8)	:	IEC 320 C13 10A female
	:	IEC 320 C19 16A**
Input fuse	:	IEC Ø5x20*
	:	Thermal circuit breaker**
CardConnect Slot	:	(not for 700 VA models)

* = 700-1500VA models

** = 2200-3000VA models



3.2 Enclosure

700-1500VA	: CF 34
2200-3000VA	: CF 64
Battery module	: CF 34
Construction	: steel - plastic
Colour	: RAL 7035 (light grey)
Protection	: IP 20
Packaging	: recycleable, rugged


3.3 Dimensions

700-1500VA (hwxwd, mm)	: 133.5 (3HU) x 450 (19") x 440
2200-3000VA (hwxwd, mm)	: 267 (6HU) x 450 (19") x 440
Depth required in 19" rack	: 420 (without connectors)
Battery module	: 133.5 (3HU) x 450 (19") x 440

Shipping dimensions (hwxwd, mm)

700-1500VA and battery module	: 255 x 550 x 550
2200-3000VA*	: 635 x 560 x 560

* The **Match 19"** 2200/3000 are shipped with 2 separately packed battery drawers on one pallet.

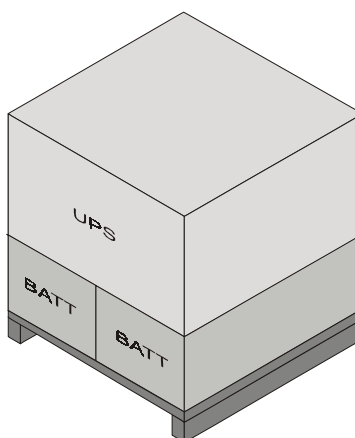

3.4 Weight

Match 19" model	:	700	1000	1500	2200	3000
Weight without battery drawer (kg)	:	14	15	15	31	33
Weight with battery drawer (kg)	:	19	22	26	50	57
Shipping weight (kg)	:	23	26	30	58	65
Battery module for Match 2k2/3k:						
Weight (kg) 36V/14AH	:	26				
48V/14Ah	:	30				
Shipping weight (kg) 36V/14AH	:	29				
48V/14Ah	:	33				



4 - Electrical Specifications

4.1 Ratings

Match 19" model	:	700	1000	1500	2200	3000
Voltage Amperes (VA) with computer type load	:	700	1000	1500	2200	3000
Watts (W) with resistive load	:	420	600	900	1540	2100

4.2 Input

AC input voltage	:	220 - 240 V				
AC input voltage window	:	165 - 275 V, mains operation				
Max. AC input voltage	:	350V (above 275V battery operation)				
Minimum start-up AC voltage	:	187V (at any load)				
Input frequency	:	50 Hz or 60 Hz				
Input frequency range	:	nominal \pm 5 Hz				
Typical no-load power consumption, normal operation (W)	:	7	12	12	15	15
AC input current (A)	:	4.0	6.0	8.0	12	16
Input thermal circuit breaker (A)	:	n.a.	n.a.	n.a.	16	16
Input fuses (A)	:	5	10	10	n.a.	n.a.

4.3 Output

AC output voltage	:	230 V nominal (suitable for 220-240 V loads)				
AC output voltage tolerance	:	190-254 V (230V \pm 2% when operating on battery)				
Output frequency	:	50 Hz or 60 Hz, autosensing in case of battery start: equal to last input frequency				
Output frequency stability	:	< \pm 0.1 Hz (battery operation)				
Output waveform	:	sine wave				
Crest factor handling	:	up to 6:1				
Power factor	:	0.6 (0.7 at 90% load) (Match 19" 700-1500) 0,7 (Match 19" 2200-3000)				
Buck/boost voltage regulation	:	at 165-275Vac input voltage, the output voltage varies between 190-254Vac				

		Match 19"			
			700-1500	2200-3000	
Transfer/reverse transfer voltages	normal \Leftrightarrow boost		202 / 215	207 / 217	
	boost \Leftrightarrow super boost		n.a.	172 / 182	
	normal \Leftrightarrow buck		254 / 240	265 / 255	
	boost \Leftrightarrow battery		165 / 175	140 / 150	
	buck \Leftrightarrow battery		275 / 265	305 / 295	
Transfer time	:	typically 4 ms.			

4.4 General Design Criteria

Safety	:	EN 50091-1-1 (EN 60950, IEC 950)
Electromagnetic compatibility	:	EN 50091-2 (EN 50081-1 + EN 50082-1)

Note: The UPS is intended for use in normal domestic and office situations



5 - Performance Characteristics

Match 19" model : 700 1000 1500 2200 3000

5.1 Efficiency

On mains : typical 98%
 On battery : typical 82%
 Max heat output @ 100% load, mains operation (W/h) : 8.5 12.3 18.3 25 36.7

5.2 Environment

Ambient temperature : -10 to 40°C, -5% per °C up to 60°C
 Audible noise at 1 meter : less than 45 dB(A), load and temperature dependent
 Max. relative humidity : 95% (non-condensing)

5.3 Runtimes (ratings given for 25°C)

At typical UPS load (75%)	12	13	16	7	7
Watts*	runtime in minutes				
60	84	120	190	210	263
180	26	41	70	82	104
300	13	23	41	50	69
420	8	15	30	35	47
600	-	8	20	22	30
900	-	-	10	11	17
1540	-	-	-	5	7
2100	-	-	-	-	5

* max. power factor: **Match 19"** 700-1500: 0.6
Match 19" 2200/3000: 0.7

5.4 Standard Features

Wide AC input voltage window

Minimises the need for battery operation

Automatic voltage regulation

The buck and boost function reduces the input voltage variations to acceptable levels for the load.

Excellent high voltage protection

Protects itself and the load up to 350Vac.

True RMS voltage and output power information

All monitored information is based on real values, not on mean- or estimated values which means accurate information on voltage, load and runtime.

Battery start

Allows you to switch on the unit whilst the mains input is absent.

Output frequency automatically set at 50 or 60 Hz (auto sensing)

Suitable for 50Hz and 60Hz mains systems.
 No risk for wrong frequency on battery mode.

Sinewave output voltage

Normal electronic equipment is designed to operate from a true sinewave input. Some loads as frequency controllers or monitors could have problems with a blockshaped output voltage.

Low "green" power consumption during normal operation

Saves energy: 100% return on investment in 5 years, compared to other line interactive UPS's



Superior battery management:

- **Quick advanced battery test**
UPS keeps running in normal operation while testing the battery, instead of switching to battery operation. This means no risk to interrupt the load if the battery is empty or damaged, or in case of overload.
- **Lowest battery temperature during mains operation**
The design of the unit resulted in significantly lower battery temperature which increases battery lifetime.
- **Battery charging at 165V input**
Fast recovery of back up power even in bad mains situation. Increases uptime and battery lifetime.
- **Autocharging**
Charger is switched on automatically when mains input is present
- **Automatic boost/floatcharger**
Reduces recharge time to 2 hours without overcharging. Increases uptime

Additional standard features for Match 19" 2k2/3k:

High battery recharge current

Fast recharging of long runtime versions.

Deep battery calibration test

The actual battery capacity can be tested and calibrated ensuring accurate runtime prediction.

Load dependent end-of-discharge

Batteries may discharge deeper if the discharge time is shorter. This feature gives maximum runtime at any load, without the risk of damaging the batteries.

6 - Communications Port: ComConnect

6.1 Principles of Operation

Located at the back of the unit, the ComConnect is a plug-in interface port (9-pin, Sub-D, male) which enables advanced communication between the UPS and the computer (interface kit required).

The microprocessor controlled ComConnect sends information concerning power levels and UPS condition to the computer or network interface. In the event that batteries are near exhaustion, it sends commands for unattended controlled shutdown of computer systems. The ComConnect can also receive UPS shutdown signals from the computer or network interface.

Please note that the common of the ComConnect is connected to earth.

When signals are sent to the computer, a written message can appear on the screen to inform the user.

Monitored conditions include:

- mains voltage availability
- discharge level of batteries
- input/output voltage
- interactive control- and diagnostic information for stand-alone and network systems
- current alarm status

Interface kits (cables and/or software) are available for operating systems supporting JAVA and most commonly used network operating systems, including Novell, UNIX, VMS, Windows, IBM AS/400, IBM OS/2, LINUX.

For specific information on **GE Digital Energy's** connectivity products please contact your local dealer or Internet: www.gedigitalenergy.com.

6.2 Pin Functions

Port description: male, 9-pin Sub-D

Pin #	Function
1	RS232 input
2	RS232 output
3	No function
4	PnP: Plug and Play
5	Common, protective earth
6	No function
7	Battery low
8	UPS connected
9	Mains failure

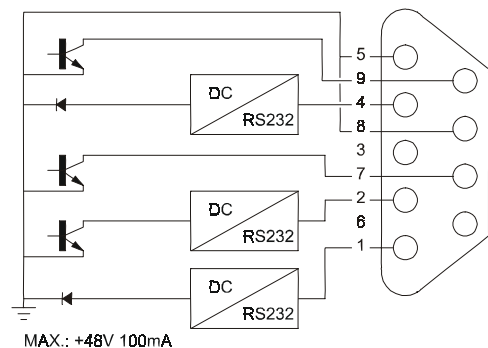


Figure 3: ComConnect port
M19" 700-1500

Pin #	Function
1	RS232 input (UPS shutdown)
2	RS232 output
3	No function
4	PnP: Plug and Play
5	Common
6	No function
7	No function
8	UPS connected
9	No function

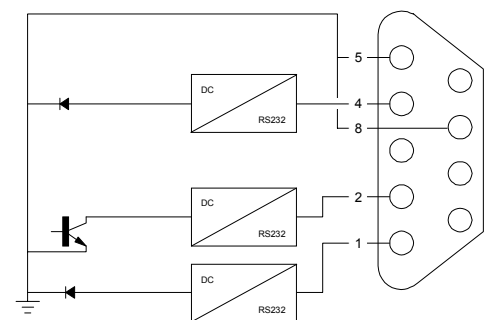


Figure 4: ComConnect port
M 19" 2200-3000



7 - Batteries (ratings given for 25°C)

Match 19" model	:	700	1000	1500	2200	3000
Nominal voltage (Vdc)	:	24	36	36	36	48
Batteries (number / Ah)	:	2/7	3/7	3/12	6/7	8/7
Type	:	sealed and maintenance free				
Service life	:	up to 6 years (depending on operating conditions)				
Runtime	:	see section 5.2, Runtimes				
Battery recharge current (A)	:	3	3	3	3.5-10*	3.5-10*
Battery recharge time	:	approx. 2 hours for 90% capacity				

*: depending on programmed battery capacity

Long term storage: see chapter 9

8 - Options (1000-3000VA models)

8.1 SNMP Interface Card

An SNMP interface card can be placed in the CardConnect slot in the rear panel of the UPS, and allows the data interface to be connected directly to an Ethernet network. When this option is installed the ComProt communication link is no longer available to the user.

8.2 Relay Interface Card

An interface card supporting ComConnect-05 can be placed in the CardConnect slot in the rear panel of the UPS. Potential free change-over contacts are available for the following alarms:
mains failure, battery low.

The contacts are wired to a terminal strip and to a 9-pole sub-D connector.

8.3 DC-Extension Cables

DC-extension cables for **Match 19"** 2200VA and **Match 19"** 3000VA are available for custom-built long runtime solutions. Please contact your dealer for specific information.

9 - Transport / Storage

No liability can be accepted for any transport damage when the equipment is shipped in non-original packaging. During transport the battery drawer(s) must either be removed or fixed with two screws (each) at the rear side of the UPS.

Store the UPS in a dry location with the batteries in a fully charged state. Storage temperature must be within -20 +45 °C. If the unit is stored for a period exceeding 3 months, optimal battery lifetime is obtained if the storage temperature does not exceed 25°C.

If the unit is stored for an extended period of time, the batteries must be recharged periodically. Be sure that the battery drawers are connected to the UPS. Subsequently connect the unit to a wall outlet and recharge the batteries for 24 hours:

- if the storage temperature is within -20 and +30°C: every 3 months,
- if the storage temperature is within -20 and +45°C: every month.