


# PCI-7841 / cPCI-7841

## Dual-port Isolated CAN Interface Cards

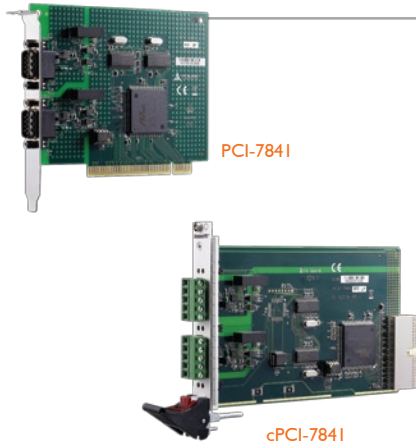

PCI-7841

cPCI-7841

### Introduction

The PCI-7841/cPCI-7841 is a Controller Area Network (CAN) interface card. It supports a dual-port CAN interface that can run independently or bridged together. The built-in CAN controller is a Philips SJA1000, which provides bus arbitration and error detection with auto correction and re-transmission functionality.

### Controller Area Network

The CAN (Controller Area Network), a serial bus system originally developed by Bosch for use in automobiles, is increasingly used for industry automation. Its multi-master protocol, real-time capability, error correction and high noise immunity makes it especially suited for intelligent I/O devices control network.

### Features

- Two independent CAN network operation
- Up to 1 Mbps programmable transfer rate
- 16 MHz CAN controller frequency
- 2500 VRMS isolation protection
- Direct memory mapping to the CAN controllers
- Powerful master interface for CAN bus protocols
- PCI bus plug-and-play
- Supports Windows® 2000/XP and Linux operation systems
- Only supports CompactPCI interface 5V (I/O)

### Software Support

- **PCI-7841**
  - Dos driver
  - Windows® NT/2000/XP/7
  - Linux driver
- **cPCI-7841**
  - Dos driver
  - Windows® NT/2000/XP/7
  - Linux driver

### Specifications

■ Ports 2	CAN channels (V2.0 A, B)
■ CAN Controller	SJA1000
■ CAN Transceiver	82C250/251
■ Isolation Voltage	2500 VRMS
■ Connectors	Dual DB9 male connectors for PCI-7841 5-pin screw terminal for cPCI-7841
■ Operating Temperature	0 to +60 °C
■ Storage Temperature	-20 °C to +80 °C
■ Humidity	5 to 95%, non-condensing
■ Power Consumption	+5 V @ 400 mA typical, @ 900 mA max.
■ Dimensions	PCI-7841: 132 mm x 107 mm (H x L) cPCI-7841: 100 mm x 160 mm (H x L)

### Ordering Information

- **PCI-7841**  
Dual-port isolated CAN interface card
- **cPCI-7841**  
Dual-port isolated CAN interface card in 3U CompactPCI form factor
- **cPCI-7841R**  
Dual-port isolated CAN interface card in 3U CompactPCI form factor with rear I/O support

1

Software & Utilities

2

DAQ

3

PXI

4

Modular Instruments

5

GPIB & Bus Expansion

6

Motion Control

7

Real-time Distributed I/O

8

PAC

9

Remote I/O

10

Communications

11

Vision

12

Fanless Embedded Computers

13

cPCI & Industrial Computers