




Vandal proof Stainless Steel Keyboards

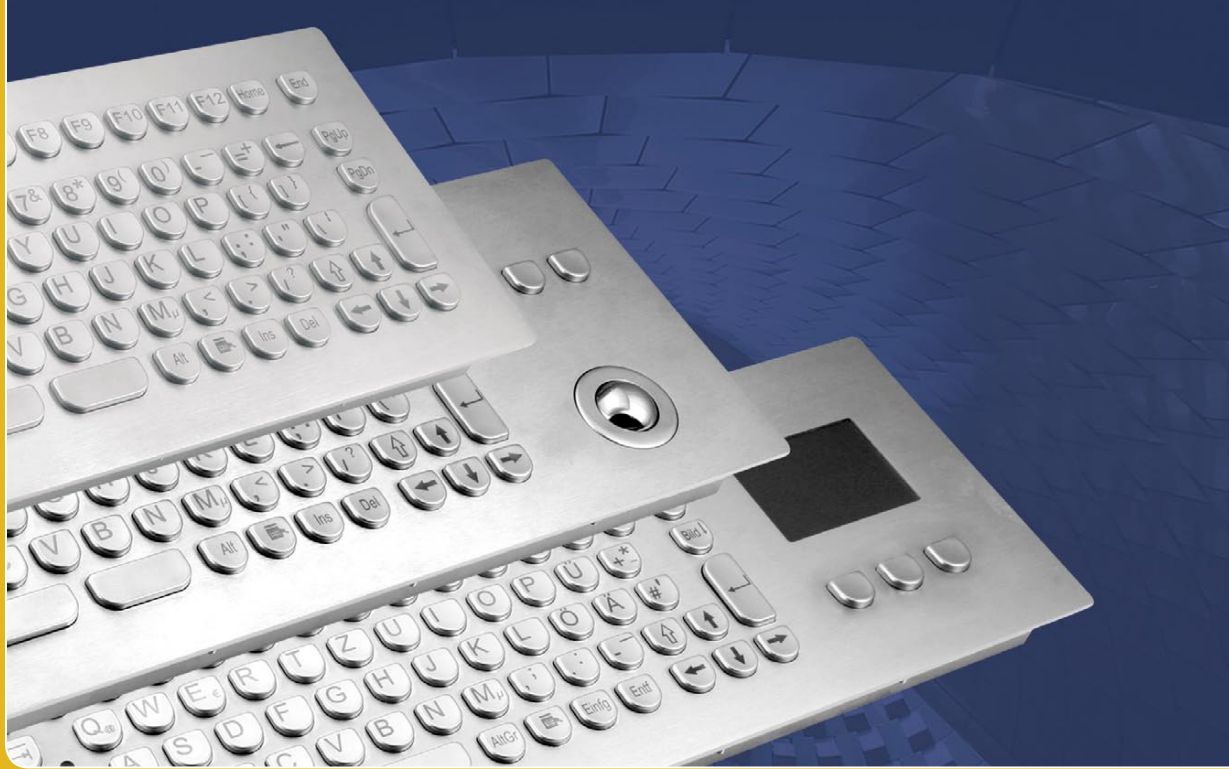

These Stainless Steel Keyboards have been specially developed for the POI and heavy industrial markets. The stainless steel front plate and key caps protect the internal electronics from vandalism and heavy impact. A silicone membrane between the keycaps and the silicon switching elements prevent any ingress from liquid and dust and is sealed up to IP65 standards. The product is available as keyboard only or with a 25 or 38 mm stainless steel trackball. The trackball is sealed to IP65 standards when static and IP54 when in motion. All legends are laser etched into the key caps which guarantees high wear and tear resistance.

Features and benefits:

- Robust and durable
- Silicone switching elements
- 25 or 38 mm stainless steel integrated trackball or touchpad available
- Black resin trackball available
- PS/2 and USB compatible
- Panel-mount version with mounting studs on rear-side
- Laser engraved key legends for excellent durability
- Non removable keycaps
- High operating comfort and good tactile feedback
- IP65 (NEMA 4x) sealing, water and dust proof
- >10 million operations per key
- Activation force 1 N / key travel 1.5 mm
- Semi or full customisation available

TKV-084-TB25V-MODUL



InduSteel™



Specification

Number of Keys:	84
Keyswitch Technology:	silicone switching element
Actuation Force-/Travel:	1 N / 1,5 mm
Keyswitch Lifetime:	10 mil. operations
Protection Level:	IP65; NEMA 4x
Mounting Type:	panel mount
Dimensions:	385 x 145 x 33 mm 15.15" x 5.70" x 1.3"
Weight:	1700 g
Operating Temperature:	-40 °C to 90 °C -40 °F to +194 °F
Frontplate Material:	stainless steel

Specification Trackball

Ball Diameter:	25 mm; 0,98"
Actuation Force:	65 g
Protection Level:	IP65 static (NEMA 4x), IP54 dynamic (NEMA 3/13)

Cat.-No.	Product Name	
KV01211	TKV-084-TB25V-MODUL-PS/2-US	PS/2; US-Layout; with trackball
KV01217	TKV-084-TB25V-MODUL-USB-US	USB; US-Layout; with trackball
KY13001	TKY-084-TB25V-MODUL-GASKET	Gasket
Other language versions/interfaces/configuration available on request		

Vandal proof Stainless Steel Keyboards

InduKey®
Industrial Input Devices

TKV-105-TB38V-MODUL

InduSteel™

NEW



- MFII-layout with integrated 38mm-trackball



Specification

Number of keys:	105
Keyswitch Technology:	silicone switching element
Actuation Force/ -Travel:	1 N / 1.5 mm
Keyswitch Lifetime:	10 mil operations
Protection Level:	IP65, NEMA 4x
Mounting Type:	panel mount
Electronic Interface:	PS/2, USB
Dimensions:	446 x 145 x 36 mm 18.89" x 7.16" x 1.42"
Weight:	2650 g
Operating Temperature:	-40 °C to +90 °C -40 °F to +194 °F
Enclosure Material:	stainless steel

Specification Trackball

Ball Diameter:	38 mm (1.5")
Actuation Force:	50 g
Trackball Lifetime:	> 6 mil. Revolutions
Protection Level:	IP65 static (NEMA 4x), IP54 dynamic (NEMA 3/13)

Cat.-No.	Product Name	
KV14006	TKV-105-TB38V-MODUL-PS/2-US	PS/2; US-Layout
KV14008	TKV-105-TB38V-MODUL-USB-US	USB; US-Layout
KY14205	TKV-105-TB38V-MODUL-GASKET	Gasket
Other language versions/interfaces/configuration available on request		

TKV-084-TOUCH-MODUL



InduSteel[™]



Specification

Number of Keys:	84
Keyswitch Technology:	silicone switching element
Actuation Force/-Travel:	1 N / 1,5 mm
Keyswitch Lifetime:	10 mil. operations
Protection Level:	IP65; NEMA 4x
Mounting Type:	panel mount
Dimensions:	385 x 145 x 30 mm; 15.15" x 5.71" x 1.18"
Weight:	2000 g
Operating Temperature:	-40 °C to 90 °C -40 °F to +194 °F
Frontplate Material:	stainless steel

Specification Touchpad

Motion Detection Method:	capacitive
Active Area:	60 x 44 mm 2.36" x 1.73"

Cat.-No.	Product Name	
KV13001	TKV-084-TOUCH-MODUL-PS/2-US	PS/2; US-Layout
KV13003	TKV-084-TOUCH-MODUL-USB-US	USB; US-Layout
KY13004	TKY-084-TOUCH-MODUL-GASKET	Gasket
Other language versions/interfaces/configuration available on request		

InduSteel - The Stainless Steel Keyboard

InduKey[®]
Industrial Input Devices

TKV-068-TB38V-MODUL

InduSteel²[™]



- Kiosk designed web- and e-mail-hot keys



Specification

Number of Keys:	68
Keyswitch Technology:	silicone switching element
Actuation Force/-Travel:	1 N / 1,5 mm
Keyswitch Lifetime:	10 mil. operations
Protection Level:	IP65; NEMA 4x
Mounting Type:	panel mount
Dimensions:	375 x 125 x 33 mm 14.76" x 4.92" x 1.3"
Weight:	1600 g
Operating Temperature:	-40 °C to 90 °C -40 °F to +194 °F
Frontplate Material:	stainless steel

Specification Trackball

Ball Diameter:	38 mm; 1,5"
Actuation Force:	65 g
Protection Level:	IP65 static; NEMA 3; IP54 dynamic

Cat.-No.	Product Name	
KV03001	TKV-068-TB38V-MODUL-PS/2-US	PS/2; US-Layout
KV03003	TKV-068-TB38V-MODUL-USB-US	USB; US-Layout
KY13003	TKY-068-TB38V-MODUL-GASKET	Gasket
Other language versions/interfaces/configuration available on request		

TKV-084-MODUL



InduSteel™

Specification

Number of Keys:	84
Keyswitch Technology:	silicone switching element
Actuation Force/-Travel:	1 N / 1,5 mm
Keyswitch Lifetime:	10 mil. operations
Protection Level:	IP65; NEMA 4x
Mounting Type:	panel mount
Dimensions:	295 x 145 x 30 mm 11.61" x 5.71" x 1.18"
Weight:	1700 g
Operating Temperature:	-40 °C to 90 °C -40 °F to +194 °F
Frontplate Material:	stainless steel

Cat.-No.	Product Name
KV01209	TKV-084-MODUL-PS/2-US PS/2; US-Layout
KV01215	TKV-084-MODUL-USB-US USB; US-Layout
KY13000	TKY-084-MODUL-GASKET Gasket
Other language versions/interfaces/configuration available on request	

TKV-068-MODUL



InduSteel²™

Specification

Number of Keys:	68
Keyswitch Technology:	silicone switching element
Actuation Force/-Travel:	1 N / 1,5 mm
Keyswitch Lifetime:	10 mil. operations
Protection Level:	IP65; NEMA 4x
Mounting Type:	panel mount
Dimensions:	300 x 125 x 26 mm 11.81" x 4.92" x 1.02"
Weight:	1600 g
Operating Temperature:	-40 °C to 90 °C -40 °F to +194 °F
Frontplate Material:	stainless steel

Cat.-No.	Product Name
KV03005	TKV-068-MODUL-PS/2-US PS/2; US-Layout
KV03007	TKV-068-MODUL-USB-US USB; US-Layout
KY13002	TKY-068-MODUL-GASKET Gasket
Other language versions/interfaces/configuration available on request	

InduKey® - The global leader in industrial input solutions

Contact address:

**InduKey® Keyboard Production
Mahnbrueck 4
D-08233 Treuen
Germany**

**Phone: +49 / 37468 / 650 - 0
Fax: +49 / 37468 / 650 - 50**

**e-mail: info@indukey.com
Internet: www.indukey.com**