


HP-1330

Industrial HulaPoint™ Pointing Device

The HP-1330 is a smaller version of our regular HulaPoint™. The two-button device offers the versatility and convenience of the HulaPoint™ but in a compact version to suit the needs of industrial laptops and workstations. Like all of iKey's products, the sealed design means the HP-1330 is dustproof, waterproof and non-corrosive.

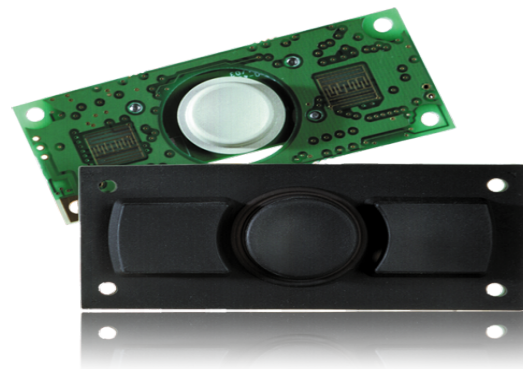

Technical Specifications

Certifications

NEMA 4X
UL60950, FCC Part 15 Class B

Key Switch

MATERIAL: Industrial silicone rubber
LIFE: 10 million cycles
TRAVEL: 0.055 in.
ACTUATION FORCE: 200g (+/- 20g)
FEEDBACK: Tactile with mechanical snap

Power

PS/2: 35mA@5V (from Mouse port)
USB: 35mA@5V (from CPU port)

Temperature Range

STORAGE: -40C to +90C
OPERATING: -40C to +70C

Humidity

100% (when properly installed)

Shock

3x11 ms pulses of 50g on each of 3 axes

Vibration

POWER SPECTRAL DENSITY: 0.04g/Hz
FREQUENCY RANGE: 20Hz - 2 kHz
DURATION OF TEST PER AXIS: 3 hours

Flammability

PRINTED CIRCUIT BOARD: 94 VO
SILICONE OVERLAY: 94 HB
INTERFACE CABLE: 94 VO

Weight

0.25 lbs (.11 kg)

Dimensions

3.10" x 1.40" x 0.45" (w-h-d)
78.7mm x 35.6mm x 11.4mm

Cable

LENGTH: 10 feet (3 meters)
DESIGN: PS/2, Serial or USB Cable

Compatibility

PS/2: All Windows Operating Systems
USB: All Windows and Macintosh OS

Warranty

1 year limited warranty

Model Numbers

HP-1330-PS2: With PS/2 cable
HP-1330-USB: With USB cable

Features and Benefits

- USB and PS/2 configurations available
- OEM Kit: PCB, rubber overlay, and cable
- 3.10" x 1.40" x 0.45" (w-h-d)