



# IEC Power Entry Inlet with Line Filter


- IEC320-C14 Filtered Inlet
- Single Fuse
- Screw Mount & Snap-in Versions
- Compact Design
- ITE Applications
- 1, 3, 6 & 10A Rating
- 6.3 x 0.8mm Faston Terminals
- Bleed Resistor
- Shielded Metal Body
- Wide Operating Temperature Range
- 3 Year Warranty



The FCSS has an IEC320-C14 inlet with a front accessible (when the mains connector is disconnected) single fuse holder, combined with a mains EMI filter in a compact single housing, to provide excellent attenuation in a compact module. When fitted to mains powered ITE equipment, they provide excellent attenuation to conducted electro-magnetic interference from the mains supply, whilst reducing any conducted emissions from within the equipment onto the mains supply. Suitable for class I appliances, all models feature a shielded metal body, and are fitted with a bleed resistor to safely discharge the filter capacitors when power is disconnected. Safety approvals are EN60939-2 for passive filters & ANSI/UL1283 for EMI filters. They feature a wide operating temperature range of -40°C to +110°C with full power operation up to +50°C.

#### **Specifications** Characteristics Minimum Maximum Units **Notes and Conditions** Typical Input Voltage 115/230 VAC Input Frequency DC 400 Hz Rated Current 10 See models and ratings table Earth Leakage Current 0.25 0.48 mΑ See models and ratings table 1.35 MHrs MIL-STD 217F Flammability Rating UL94V-2 Temperature Operating 110 °C See derating curve EN60939-2 Passive filter units for EMI suppression Safety Approvals ANSI/UL1283 Electromagnetic Interference Filters Faston 6.3 x 0.8mm straight **Terminals** Protection Class Suitable for appliances with protection Class I Dielectric Strength 1500 VAC

#### **Electrical Schematic**

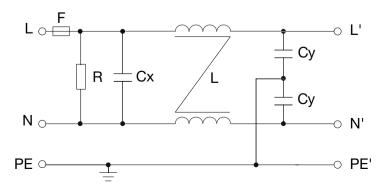

Note: Fuse not supplied







# **Models & Ratings**

Rated current	Leakage current		Inductance	Capacitance		Resistance	Weight	Application	Mounting	Filter
	115VAC/60Hz	250VAC/50Hz	@10kHz, 0.25V	Сх	Су	Tiesistance	vveigitt	Application	iviounting	i iitei
1 A	0.25 mA	0.45 mA	2 x 6.5 mH	0.1 μF	4.4 nF	1 ΜΩ	55g	ITE	Screw	FCSS01SFR
3 A	0.25 mA	0.45 mA	2 x 2.5 mH	0.1 μF	4.4 nF	1 ΜΩ	55g	ITE	Screw	FCSS03SFR
6 A	0.25 mA	0.45 mA	2 x 0.8 mH	0.1 μF	4.4 nF	1 ΜΩ	53g	ITE	Screw	FCSS06SFR
10 A	0.25 mA	0.45 mA	2 x 0.2 mH	0.1 μF	4.4 nF	1 ΜΩ	56g	ITE	Screw	FCSS10SFR

# **Thermal Derating**

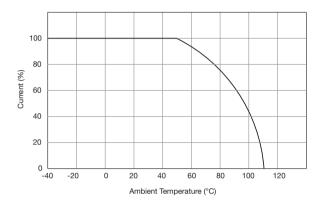

#### **Mechanical Details**

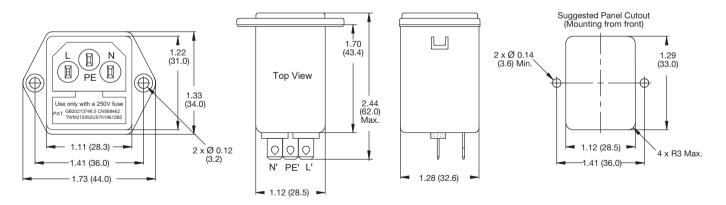

Output Terminals: 6.3 mm x 0.8 mm Fast-ons





# **Typical Attenuation Curves**

- Common Mode/Asymmetrical(L-G)

----- Differential Mode/Symmetrical(L-L)

